

Biaxy 6

Vloermodel | Bodendstehtend | floor standing version

**Indicatieve warmteafgifte | Indikative Leistung |
indicative output 75/65°C 94 - 197 Watt
(per element | pro Gleid | per section)**

-  Alleen CV (gesloten systeem met water)
Nur Heizung, (geschlossenes) Heizsystem (Wasser)
Heating only, (closed) heating system (water)
-  Combi bedrijf | CV + Elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating
-  Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

Aansluitmogelijkheden | Anschlussmöglichkeiten | Connections



Diagonaal
wechselfeitig
diagonal



enkelzijdig
einseitig
one side



onderkant L/R
unten L/R
bottom on side L/R

Kraanwerk hartmaten | Ventilabstände | Distances for valves



Ventil | valve ArtDECO K=55mm, V=55mm
Ventil | valve Liberty K=55mm, V=55mm
Ventil | valve EPOCA K=60mm, V=45mm
Ventil | valve ANUOVA K=55mm, V=55mm
Ventil | valve Buckingham Major K=49mm, V=49mm

Tolerantie | Toleranz | tolerance +/- 5mm

Technische Fiche | Technische Zeichnung | technical drawing

Alle afmetingen in [mm] | alle Abmessungen in [mm] | all dimensions in [mm]
L...lengte van de radiator | L...Gesamtlänge | L...length of radiator

+(2-4 mm) dichtingsring | Dichtungsring | gaskit

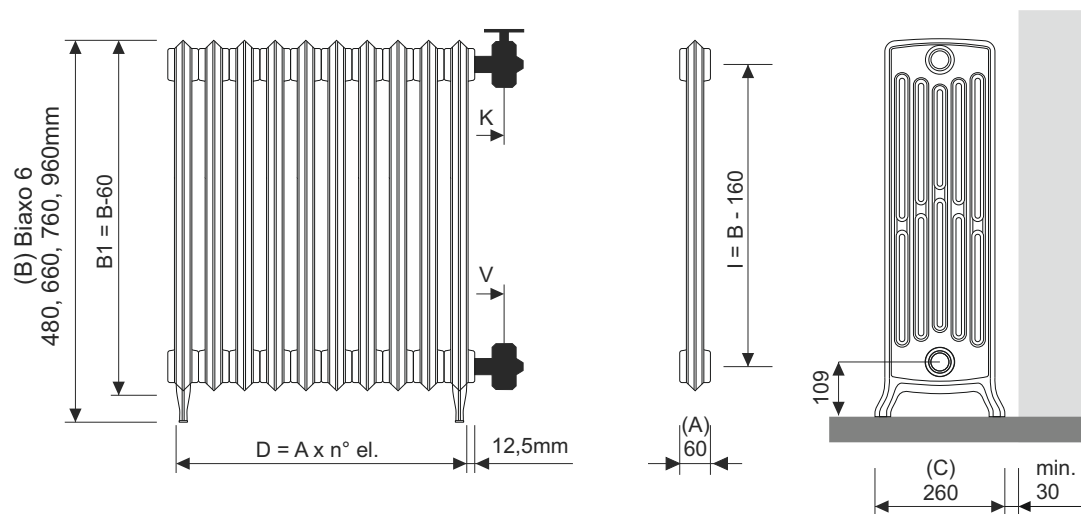

Lengte toleranties | Längentoleranz | length tolerance +/- 1%




Gietijzer | Gusseisen | Cast iron

grijs gietijzer | Grauguss | grey cast iron
4 hoogtes | Höhen | heights



Tech. spec. | Tech.Daten | data

max. 4 bar
max. 90° C




Lengtes | Längen | lengths

min. 3 max. 31 elementen | Glieder | sections
elk | nach | each 60 mm




Afwerking | Oberfläche | surface

RAL 9010 wit | weiß | white
+% toeslag andere | andere | other RAL



Elektrisch | Elektrisch | el. version ~

230V, 50Hz | max. 2000 Watt
op aanvraag | auf Anfrage | on request



Levering | Lieferung | Delivery

4-6 weken | Wochen | weeks
+2-4 vr projecten | für Projekte | for projects

Biaxo 6

Muurmodel | Wandvariante | wall mounted version

**Indicatieve warmteafgifte | Indikative Leistung |
indicative output 75/65°C 94 - 197 Watt
(per element | pro Gleid | per section)**

-  Alleen CV (gesloten systeem met water)
Nur Heizung, (geschlossenes) Heizsystem (Wasser)
Heating only, (closed) heating system (water)
-  Combi bedrijf | CV + Elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating
-  Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

Aansluitmogelijkheden | Anschlussmöglichkeiten | Connections



Diagonaal
wechseleusig
diagonal



enkelzijdig
einseitig
one side



onderkant L/R
unten L/R
bottom on side L/R

Kraanwerk hartmaten | Ventilabstände | Distances for valves


Ventil | valve ArtDECO K=55mm, V=55mm
Ventil | valve Liberty K=55mm, V=55mm
Ventil | valve EPOCA K=60mm, V=45mm
Ventil | valve ANUOVA K=55mm, V=55mm
Ventil | valve Buckingham Major K=49mm, V=49mm

Tolerantie | Toleranz | tolerance +/- 5mm

Technische Fiche | Technische Zeichnung | technical drawing

Alle afmetingen in [mm] | alle Abmessungen in [mm] | all dimensions in [mm]
L...lengte van de radiator | L...Gesamtlänge | L...length of radiator

+(2-4 mm) dichtingsring | Dichtungsring | gasket

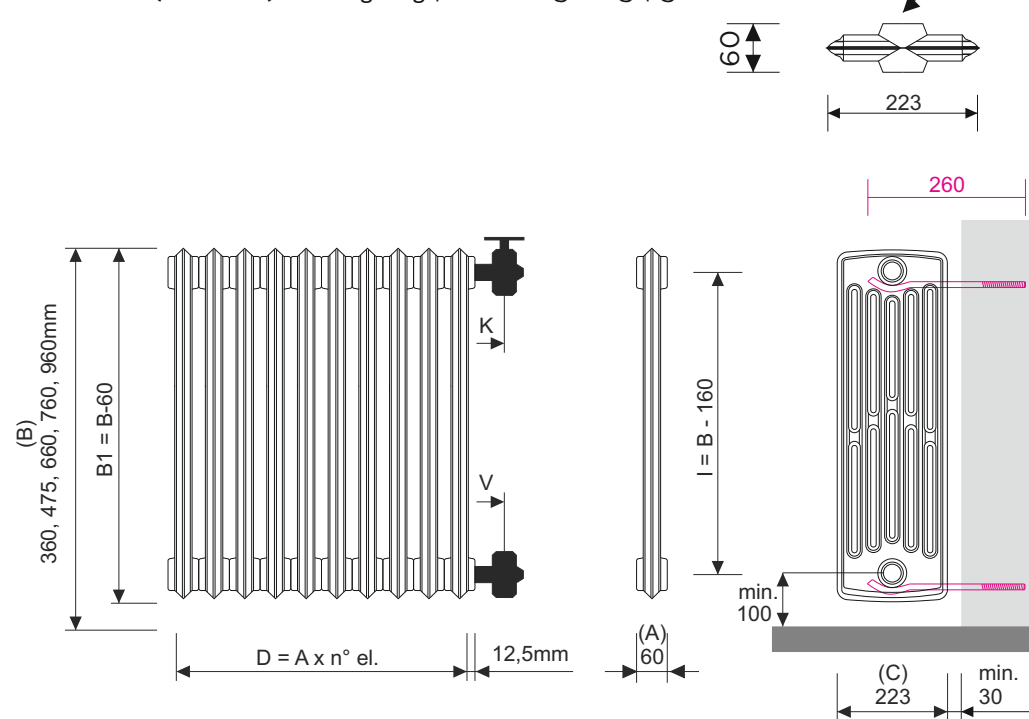

Lengte toleranties | Längentoleranz | length tolerance +/- 1%




Gietijzer | Gusseisen | Cast iron

grijs gietijzer | Grauguss | grey cast iron
4 hoogtes | Höhen | heights



Tech. spec. | Tech.Daten | data

max. 4 bar
max. 90° C




Lengtes | Längen | lengths

min. 3 max. 31 elementen | Glieder | sections
elk | nach | each 60 mm




Afwerking | Oberfläche | surface

RAL 9010 wit | weiß | white
+% toeslag andere | andere | other RAL



Elektrisch | Elektrisch | el. version ~

230V, 50Hz | max. 2000 Watt
op aanvraag | auf Anfrage | on request



Levering | Lieferung | Delivery

4-6 weken | Wochen | weeks
+2-4 vr projecten | für Projekte | for projects