

LAURENS SPIRALIX tripple, RAT3 32/92

Wandmodel | Wandvariante | wall-version

**Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 420 ~ 3270 Watt**

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

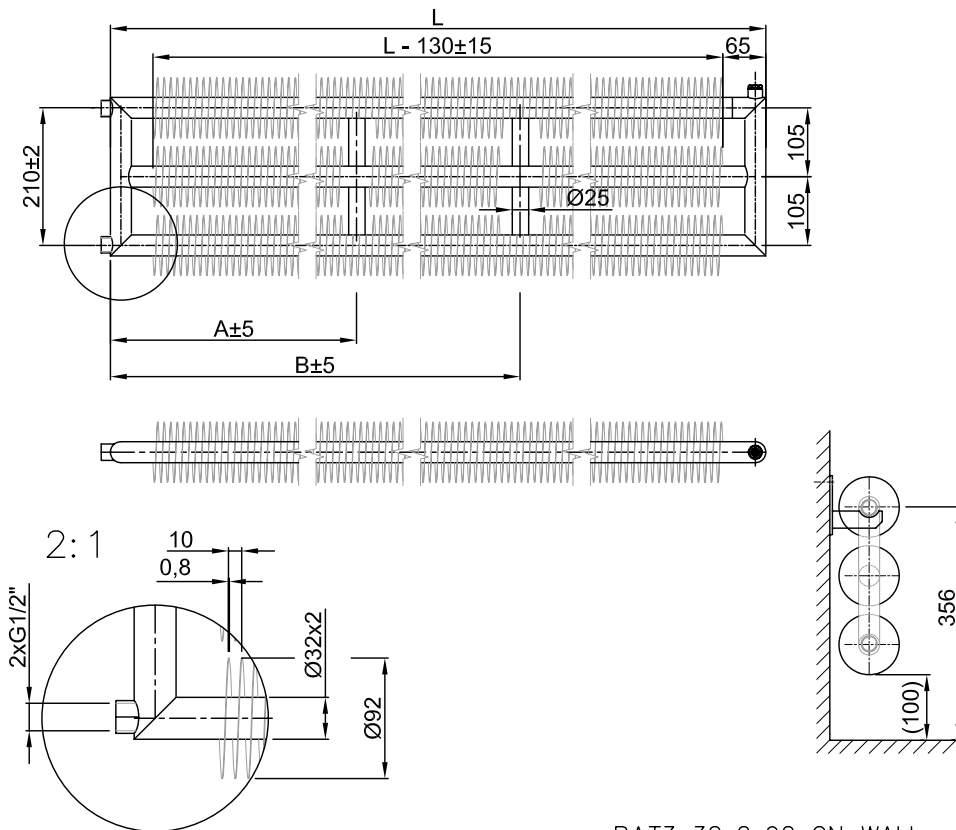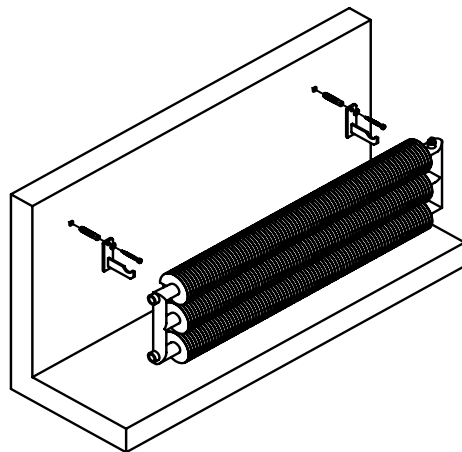

RAT3 32x2x92 ON WALL




Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm



Specificatie | Tech.Data | data

max. 10 bar
max. 120° C



Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+%
andere | andere | other RAL



Verticaal | Verticaal | vertical

Spiralix Vertical



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 32/92

Vloermodel | Fussbonenvariante | floor version

**Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 420 ~ 3270 Watt**

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

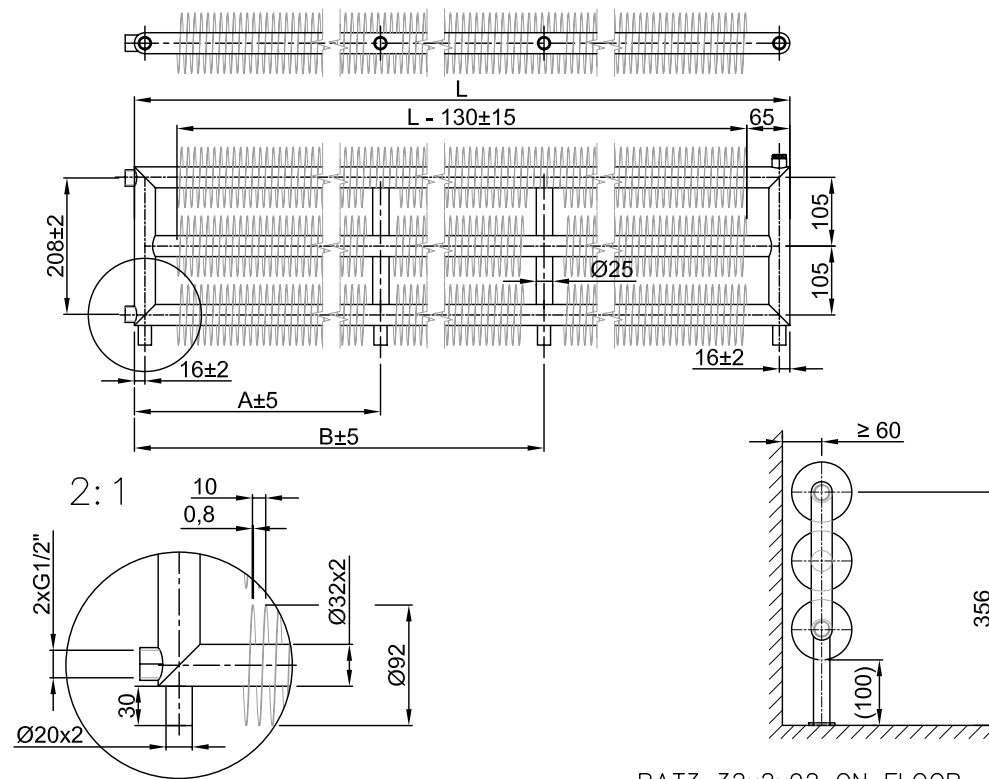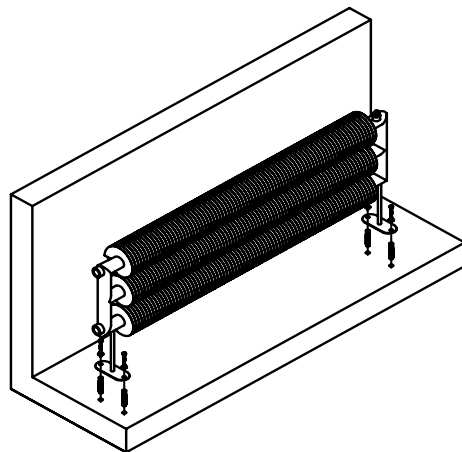

RAT3 32x2x92 ON FLOOR




Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm



Specificatie | Tech.Data | data

max. 10 bar
max. 120° C



Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+%
andere | andere | other RAL



Verticaal | Verticaal | vertical

Spiralix Vertical



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 32/92

Vrijstaand | Alleinstehend | self-standing

Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 420 ~ 3270 Watt

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

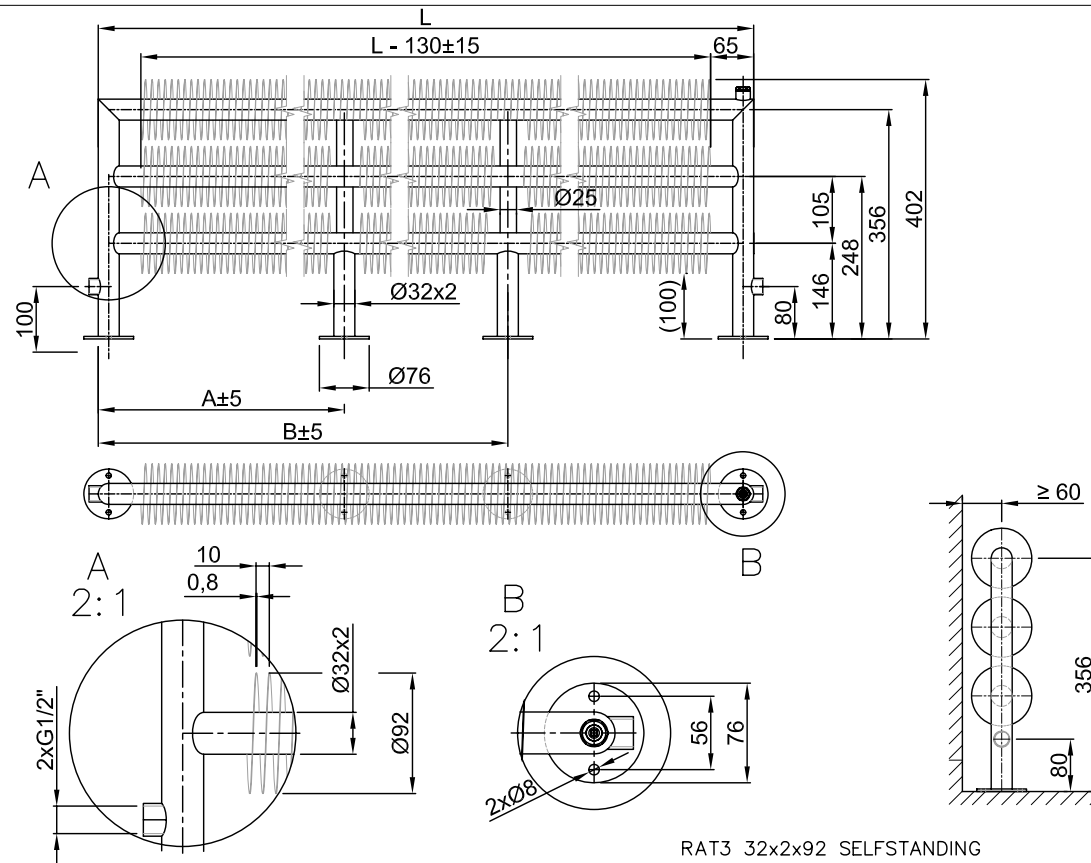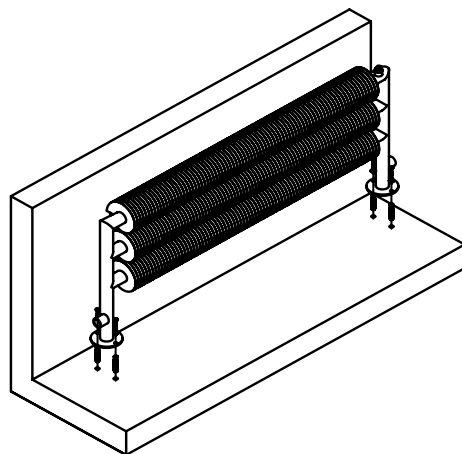

 **Staal | Stahl | steel**
Winding | Windung | finning
32/92, 56/137, 76/156mm

 **Afwerking | Oberfläche | surface**
9016 RAL wit | weiss | white+%
andere | andere | other RAL

 **Specificatie | Tech.Data | data**
max. 10 bar
max. 120° C

 **Verticaal | Verticaal | vertical**
Spiralix Vertical

 **Lengthes | Längen | lengths**
500 - 3000
per | nach | each 100mm

 **Levering | Lieferung | Delivery**
4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 57/137

Wandmodel | Wandvariante | wall-
version

**Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 420 ~ 8240 Watt**
(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

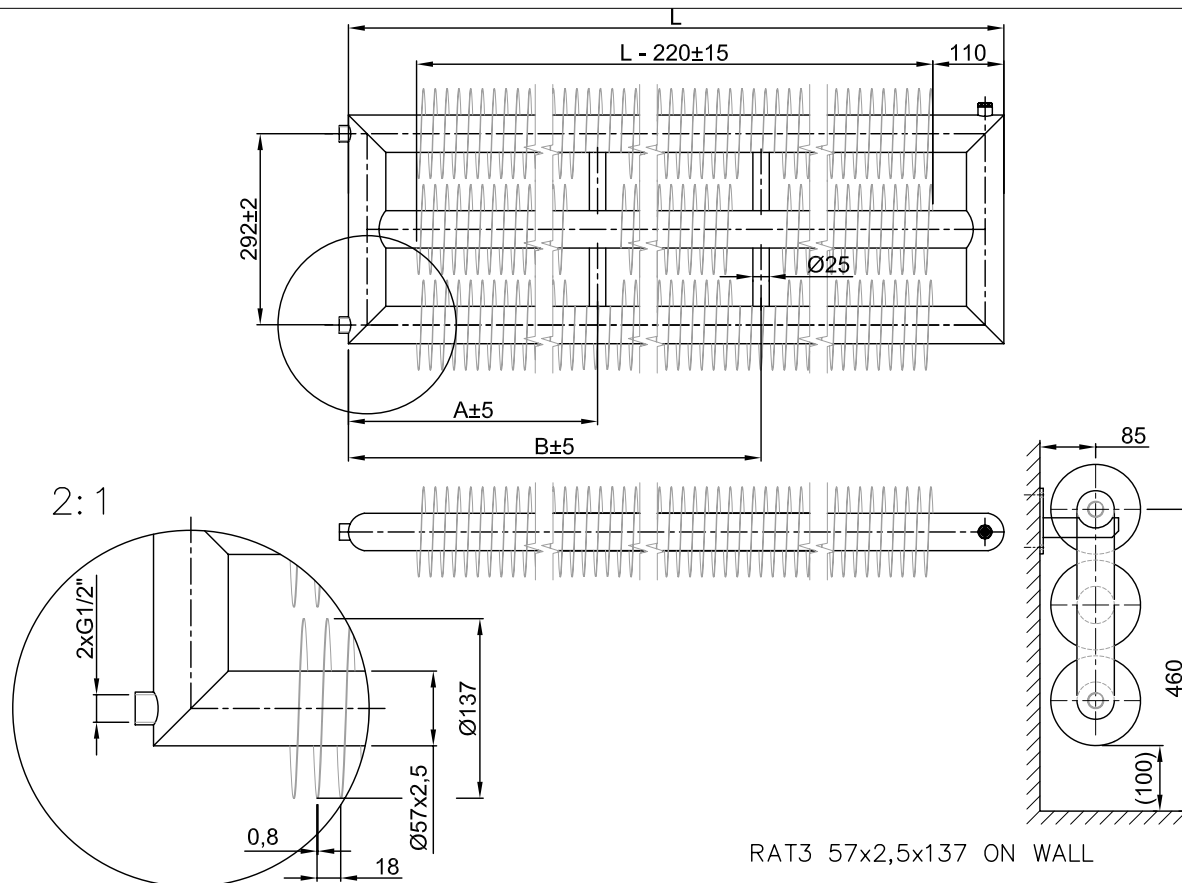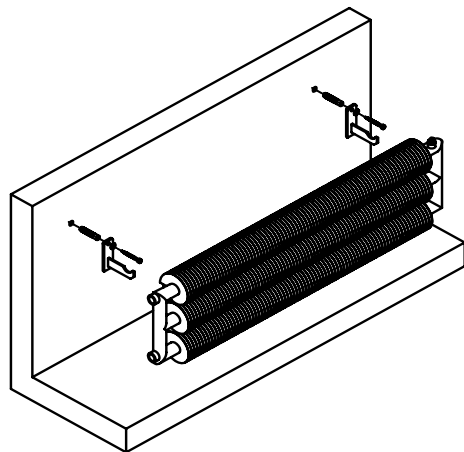

Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm



Specificatie | Tech.Data | data

max. 10 bar
max. 120° C




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+%
andere | andere | other RAL




Verticaal | Verticaal | vertical

Spiralix Vertical



Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 57/137

Vloermodel | Fussbonenvariante | floor version

**Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 420 ~ 8240 Watt**
(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

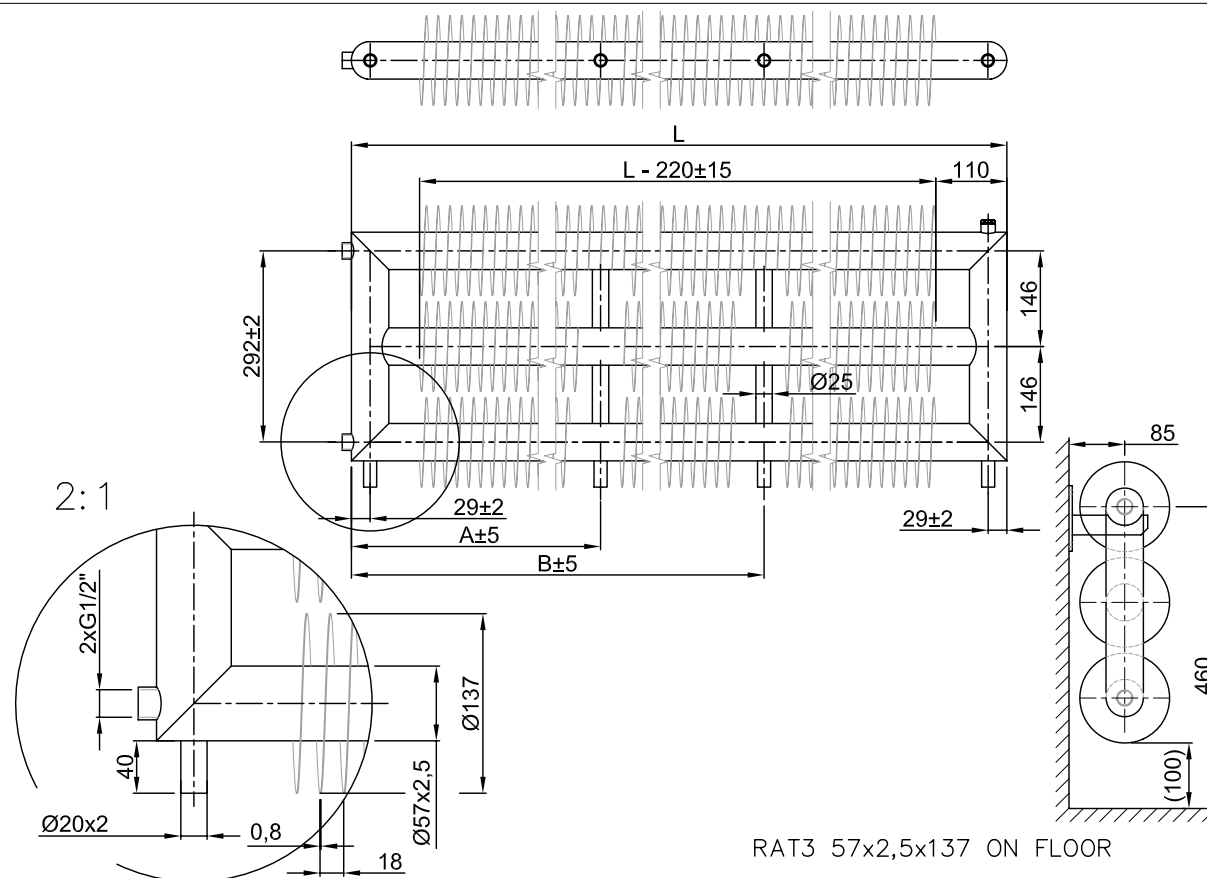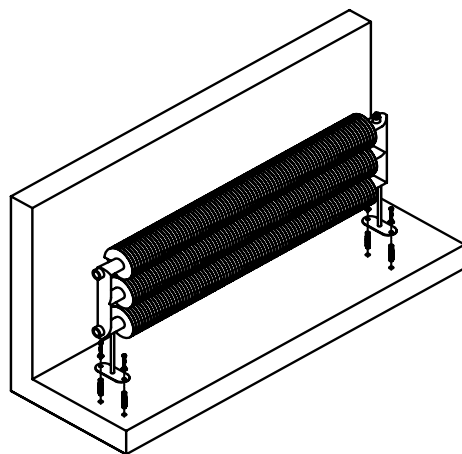

RAT3 57x2,5x137 ON FLOOR

 **Staal | Stahl | steel**
Winding | Windung | finning
32/92, 56/137, 76/156mm

 **Specificatie | Tech.Data | data**
max. 10 bar
max. 120° C

 **Lengthes | Längen | lengths**
500 - 3000
per | nach | each 100mm

 **Afwerking | Oberfläche | surface**
9016 RAL wit | weiss | white+%
andere | andere | other RAL

 **Verticaal | Verticaal | vertical**
Spiralix Vertical

 **Levering | Lieferung | Delivery**
4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 57/137

Vrijstaand | Alleinstehend | self-standing

**Indicatief vermogen | Indikative Leistung | indicative output Δt 50°
C 420 ~ 8240 Watt**

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM

L = Radiatorlänge | Heizkörperlänge | length of radiator



Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request



CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

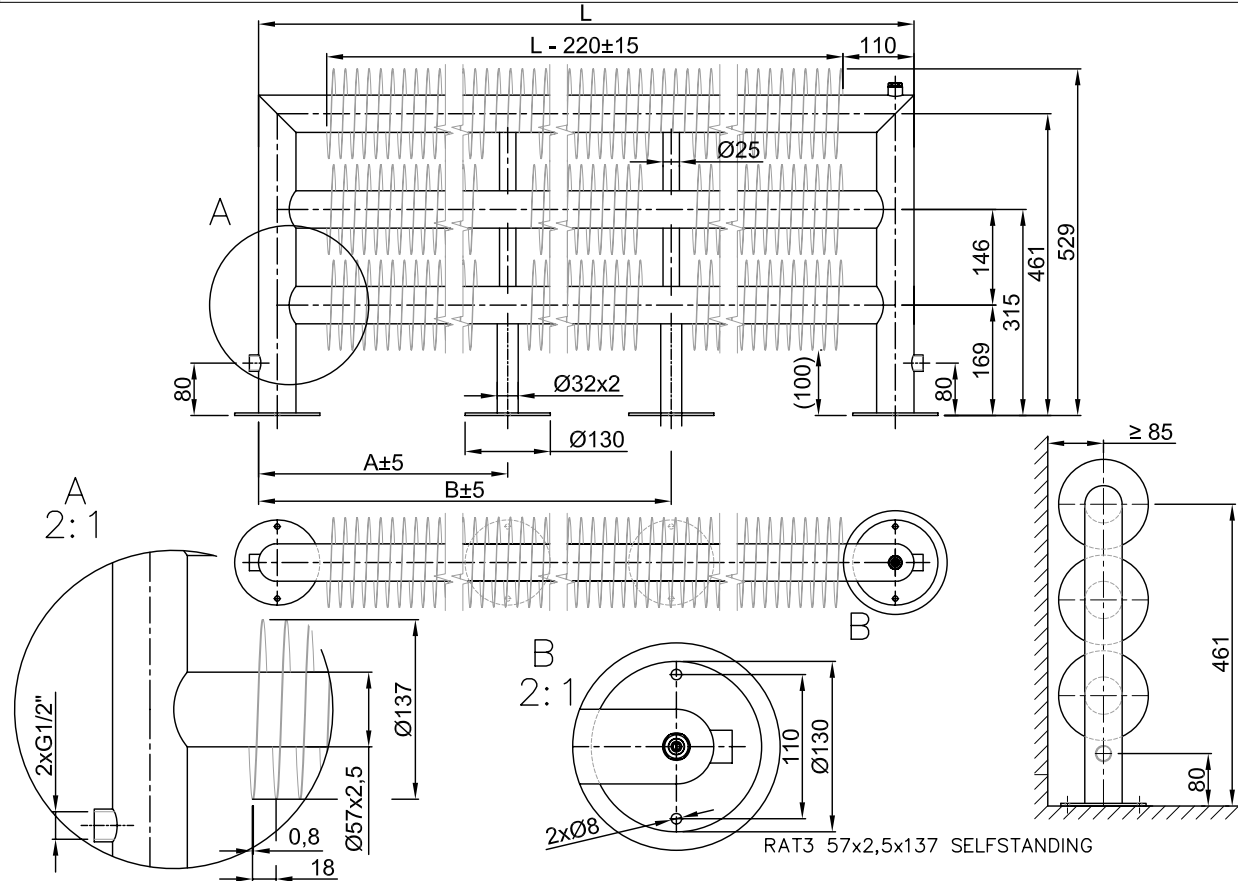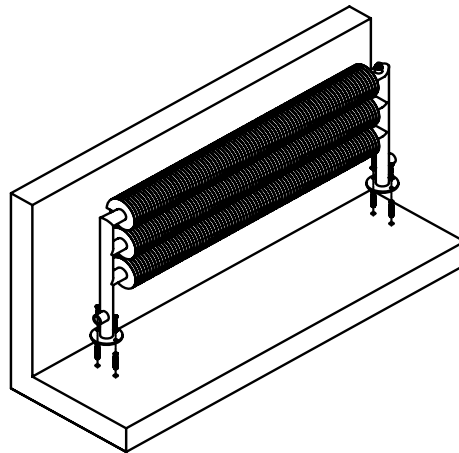

Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm


**Specificatie | Tech.Daten | data**

max. 10 bar
max. 120° C




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+
andere | andere | other RAL



Verticaal | Verticaal | vertical

Spiralix Vertical



1 **Lengtes | Längen | lengths**

500 - 3000
per | nach | each 100mm



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 76/156

Wandmodel | Wandvariante | wall-version

**Indicatief vermogen | Indikative Leistung | indicative output $\Delta t 50^\circ$
C 470 ~ 8330 Watt**

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM



L = Radiatorlengte | Heizkörperlänge | length of radiator

Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

 Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

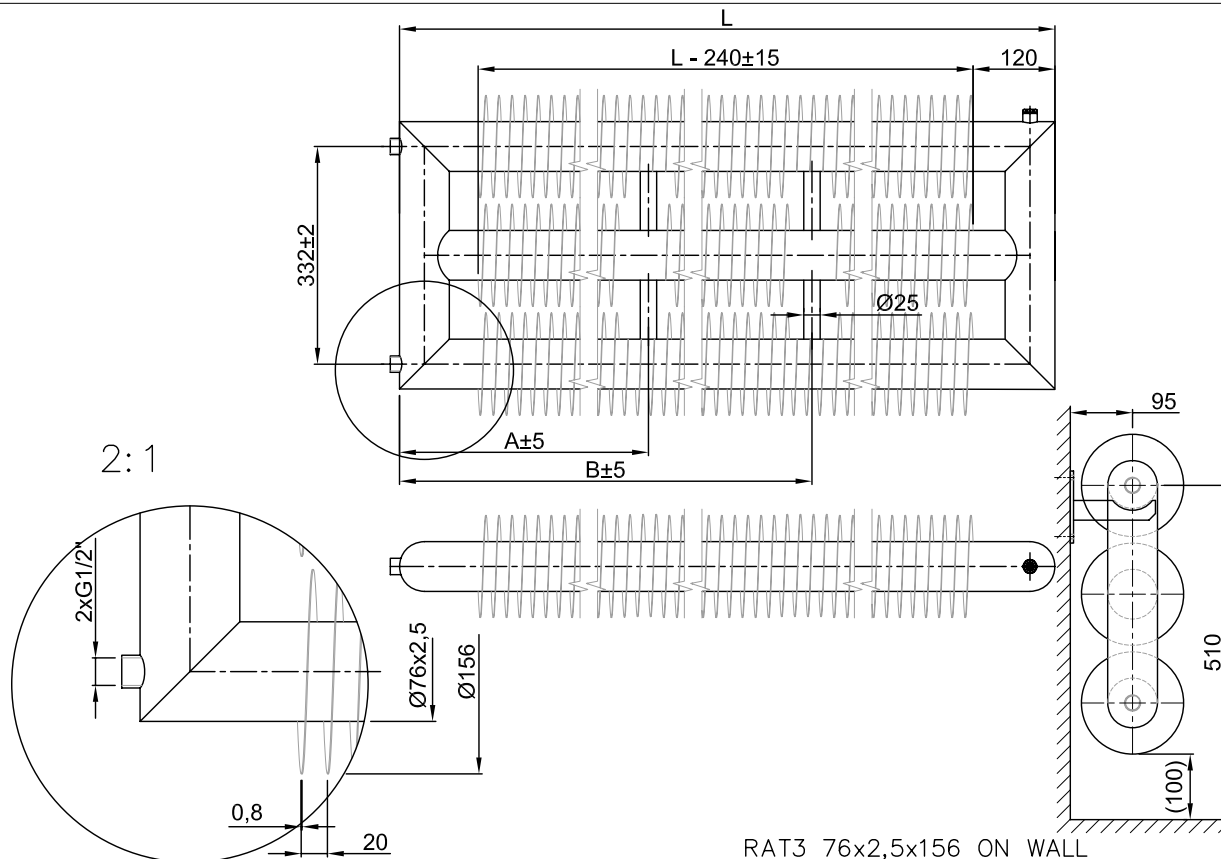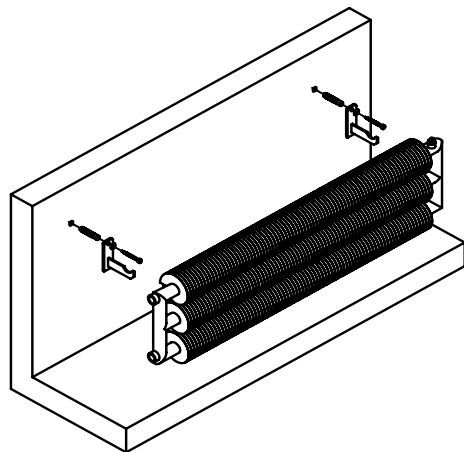

Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm



Specificatie | Tech.Daten | data

max. 10 bar
max. 120° C




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+%
andere | andere | other RAL




Verticaal | Verticaal | vertical

Spiralix Vertical



Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 76/156

**Vloermodel | Fussbonenvariante | floor
version**

Indicatief vermogen | Indikative Leistung | indicative output Δt 50°
C 470 ~ 8330 Watt

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM

L = Radiatorlänge | Heizkörperlänge | length of radiator



Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request



CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)

Combi bedrijf | CV + elektrisch
Kombi-Betrieb | Wasser + Elektrisch
Combined system | Water + electric heating

Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

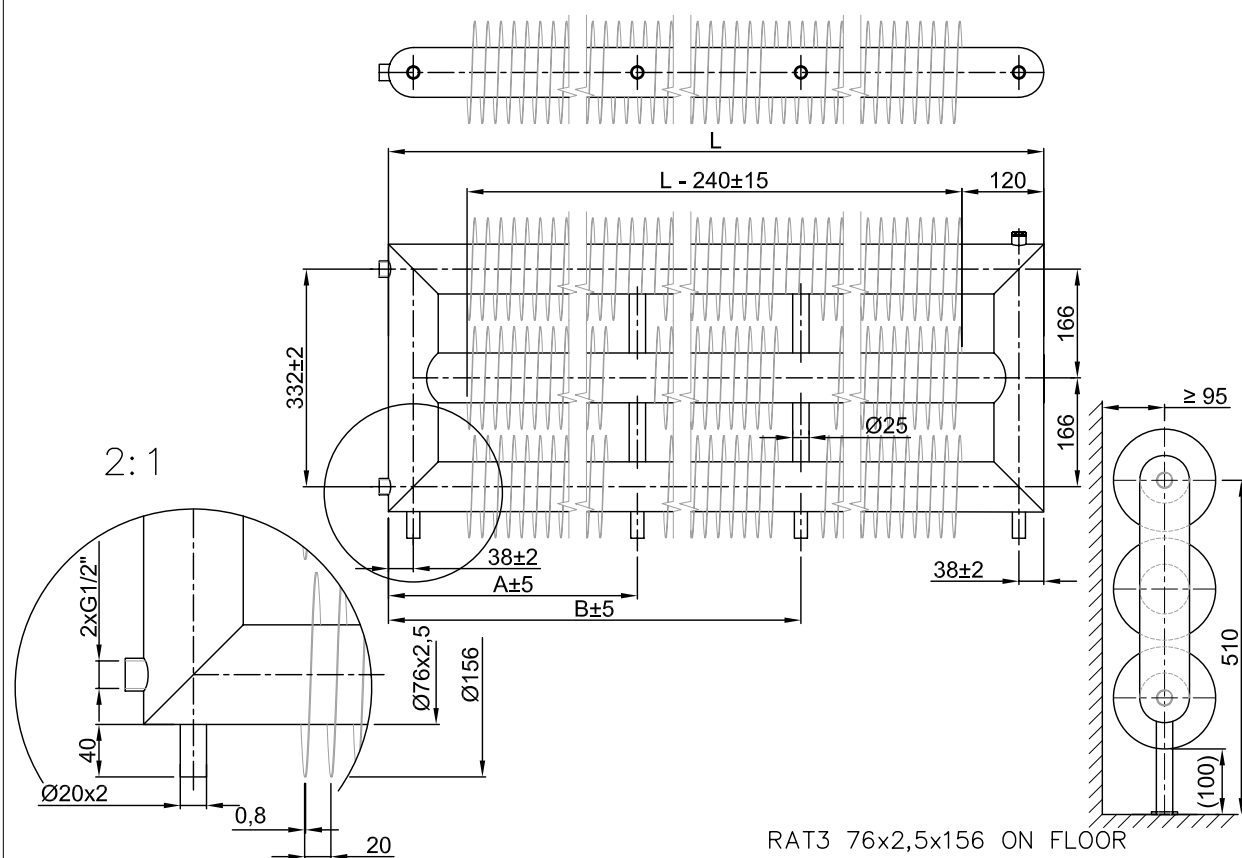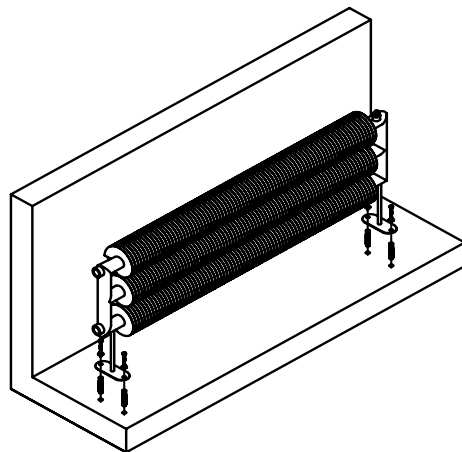


Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm

**Specificatie | Tech.Daten | data**

max. 10 bar
max. 120° C



Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm




Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+
andere | andere | other RAL



Verticaal | Verticaal | vertical

Spiralix Vertical



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks

LAURENS SPIRALIX tripple, RAT3 76/156

Vrijstaand | Alleinstehend | self-standing

Indicatief vermogen | Indikative Leistung | indicative output Δt 50°
C 470 ~ 8330 Watt

(maatafhankelijk | je nach Abmessung | according size of radiator)

Afmetingen in MM | alle Abmessungen in MM | all dimensions in MM

L = Radiatorlänge | Heizkörperlänge | length of radiator



Gladde buizen zonder Spiraal op aanvraag | glatte Rohre (ohne Windung) auf Anfrage | tubes without winding on request

 CV alleen (gesloten systeem) (water of stoom)
Nur Heizung, (geschlossenes) Heizsystem (Wasser oder Dampf)
Heating only, (closed) heating system (water or steam)



Combi bedrijf | CV + elektrisch
 Kombi-Betrieb | Wasser + Elektrisch
 Combined system | Water + electric heating

 Puur elektrisch (op aanvraag)
Rein elektrisch (auf Anfrage)
Electric version only (on request)

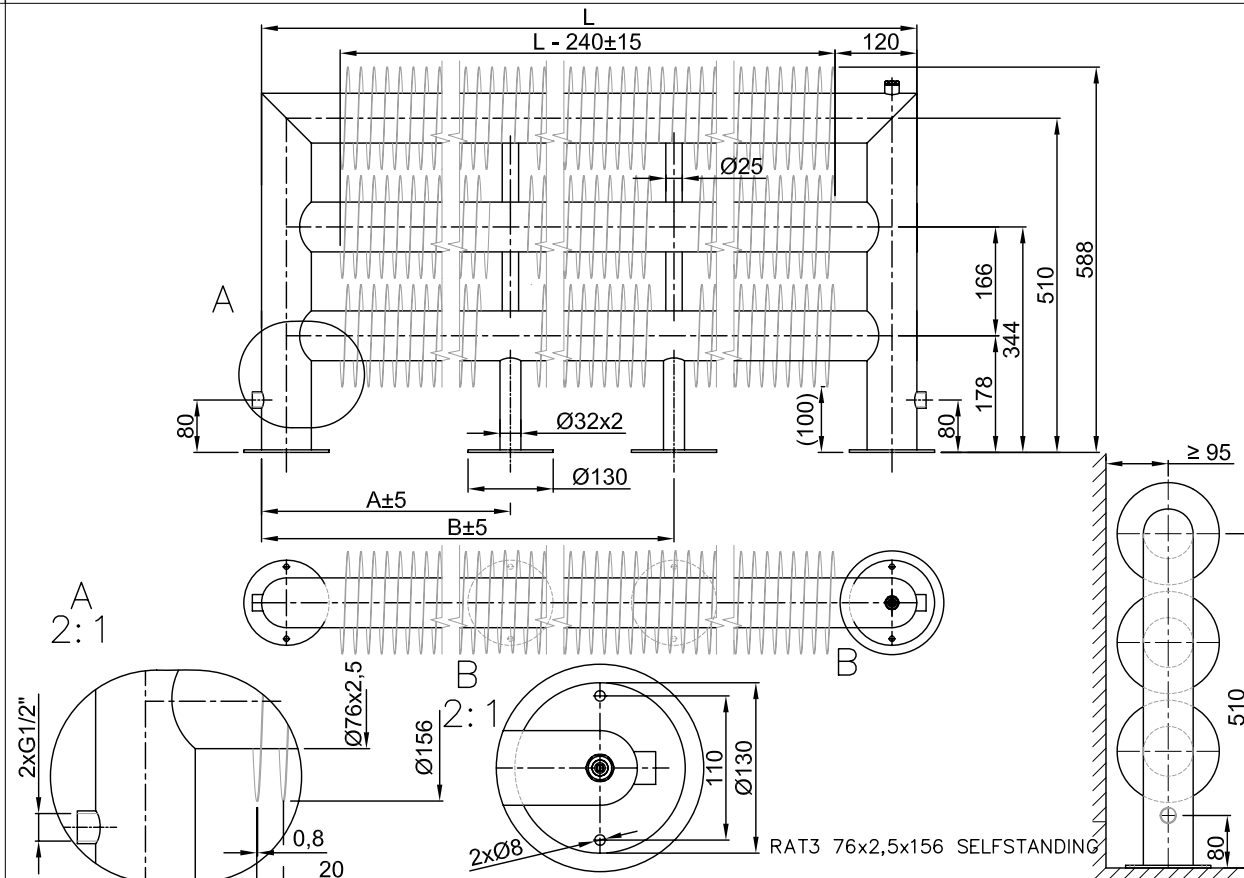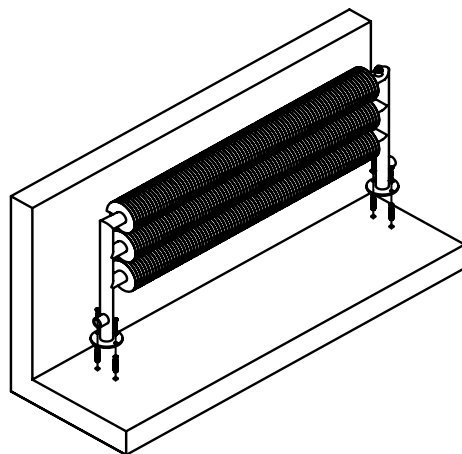


Staal | Stahl | steel

Winding | Windung | finning
32/92, 56/137, 76/156mm

**Specificatie | Tech.Daten | data**

max. 10 bar
max. 120° C




Lengtes | Längen | lengths

500 - 3000
per | nach | each 100mm



Afwerking | Oberfläche | surface

9016 RAL wit | weiss | white+
andere | andere | other RAL



Verticaal | Verticaal | vertical

Spiralix Vertical



Levering | Lieferung | Delivery

4 - 6 weken | Wochen | weeks